


## Copper Cactus J-Pole Plans

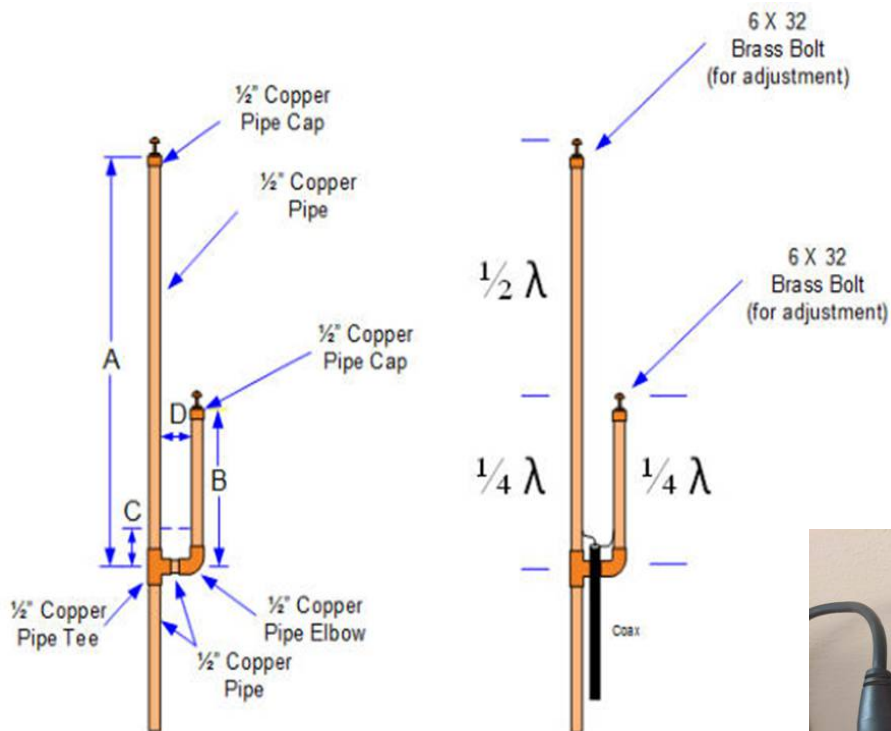

- A 8460/f
- B 2808/f
- C 276/f
- D 264/f

Dimension are in "Inches"  
f is in Mhz

Shopping list for a 2M J-Pole

- 8' of standard 1/2" copper pipe
- one 1/2" copper elbow
- one 1/2 inch copper T fitting
- two 1/2 inch copper end caps
- two 1/2 inch hose clamps
- one scrap piece of 50ohm coax with the connector of your choice, SMA, BNC... on one end.



You can tune the J-Pole either using the optional brass bolts or by moving the hose clamps up or down slightly.